Ref. SFP-3G-2110-TX



High performance ST2110 SFP transmitter module designed to encapsulate a 3G-SDI signal to ST2110 stream for transport of uncompressed video over 10GbE IP network



Overview

The SFP-3G-2110-TX module is high performance SMTPE ST2110 SFP transmitter module designed to encapsulate a 3G-SDI signal to ST2110 stream for transport of uncompressed video over 10GbE IP networks. The SFP-3G-2110-TX module is compatible with LivePremier[™] SFP+ output cards as well as with VIO 4K converters. The module has a 10GE (10GBase-SR) port to be used directly with 10GbE switches and routers. It also includes a frame synchronizer to ensure signals are aligned with the system's PTP.

Key features


- ► SMPTE ST2110 SFP transmitter
- ▶ Compatible with LivePremier[™] SFP+ input cards and with VIO 4K
- Supports 1x ST2110-20, 4x ST2110-30 and 1x ST2110-40 flows
- Supports signals up to 1080p60 10-bit 4:2:2
- Compatible with SD-SDI, HD-SDI, 3G-SDI (Level A & B)
- Multi-mode fiber with LC optical connector
- Hot-pluggable module
- Supports BT.709 and BT.2020 color spaces compatible with HDR
- Built-in frame synchronization technology
- Supports up to 8 embedded audio channels (PCM)

Dimensions

- ▶ W 0.53" x H 0.33" x D 2.22" L 13.4 mm x H 8.5 mm x P 56.5 mm
- Weight without accessories 0.031 kg / 0.06 lbs
- Shipping information
- shipped in a dedicated box
- **Operating conditions**
- Temperature: 0 to 70°C (32 to 158°F)

- Warranty
 - 1-year warranty on parts and labor back to factory
 - Broken connectors are not covered by warranty
- Power supply
- Powered from Analog Way products
- Safety Compliance
- Lead-free ► REACH and RoHS compliant
- Laser class 1
- Humidity: 5% to 95%, non-condensing

(i) Specifications subject to change without prior notice

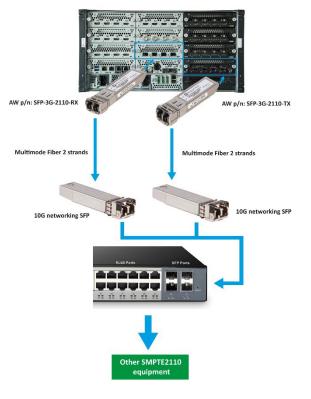

SFP-3G-2110-TX-EN-10/30/2020

